


# CCTP



**Béhar**

## Emergency escape lighting

### Recessed SATI unit – LUCE Collection

**Pictogram:** screen-printed plexiglass panel, square 105 × 105 × 10 mm

**Frame:** recessed aluminium mounting frame

Other colours available on request (RAL colour of choice).

**Recess cut-out:** Ø 67 mm (hole saw).

**Installation type:** recessed SATI units (ceiling or wall), according to the layout defined on drawings.

**Repairability:** repairable unit with spare parts available for 10 years.

### Technical characteristics:

- Power consumption (W): 0.4 W
- Apparent power (VA): 1.8 VA
- Supply voltage: 230 VAC
- Luminous flux: standby – 8 lumens; emergency mode – 60 lumens for 1 hour

### Brand and model: BEHAR Sécurité – LUCE Collection

- Ref. LUEP45C: recessed ceiling unit, square frame – ref. 76502
- Ref. LUEP45R: recessed ceiling unit, round frame – ref. 76503
- Ref. LUEM45C: recessed wall unit, square frame – ref. 76514
- Ref. LUEM45R: recessed wall unit, round frame – ref. 76515



LUEP45C



LUEP45R



LUEM45C



LUEM45R

## Ambient lighting

### Recessed SATI unit – LUCE Collection

**Frame:** recessed aluminium mounting frame

Other colours available on request (RAL colour of choice).

**Recess cut-out:** Ø 67 mm (hole saw).

**Installation type:** recessed SATI units (ceiling or wall), according to the layout defined on drawings.

**Repairability:** repairable unit with spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.4 W
- Apparent power (VA): 3.4 VA
- Supply voltage: 230 VAC
- Luminous flux: 550 lumens for 1 hour – non-maintained mode.

#### Brand and model: BEHAR Sécurité – LUCE Collection

- Ref. LUEP400C: square frame – ref. 76508
- Ref. LUEP400R: round frame – ref. 76509



LUEP400C



LUEP400R

## Addressable emergency escape lighting

### Addressable recessed SATI unit – LUCE Collection

**Pictogram:** screen-printed plexiglass panel, square 105 × 105 × 10 mm

**Frame:** recessed aluminium mounting frame

Other colours available on request (RAL colour of choice).

**Recess cut-out:** Ø 67 mm (hole saw).

**Installation type:** recessed SATI units (ceiling or wall), according to the layout defined on drawings.

**Repairability:** repairable unit with spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.4 W
- Apparent power (VA): 1.8 VA
- Supply voltage: 230 VAC
- Luminous flux: 60 lumens for 1 hour – non-maintained mode.

#### Brand and model: BEHAR Sécurité – LUCE Collection

- Ref. LUEP45AC: recessed ceiling unit, square frame – ref. 76504
- Ref. LUEP45AR: recessed ceiling unit, round frame – ref. 76505
- Ref. LUEM45AC: recessed wall unit, square frame – ref. 76516
- Ref. LUEM45AR: recessed wall unit, round frame – ref. 76517



LUEP45AC



LUEP45AR



LUEM45AC



LUEM45AR

## Addressable ambient lighting

### Recessed addressable SATI unit – LUCE Collection

**Frame:** recessed aluminium mounting frame

Other colours available on request (RAL colour of choice).

**Recess cut-out:** Ø 67 mm (hole saw).

**Installation type:** recessed SATI units (ceiling or wall), according to the layout defined on drawings.

**Repairability:** repairable unit with spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.4 W
- Apparent power (VA): 3.4 VA
- Supply voltage: 230 VAC
- Luminous flux: 550 lumens for 1 hour – non-maintained mode.

#### Brand and model: BEHAR Sécurité – LUCE Collection

- Ref. LUEP400AC: square frame – ref. 76510
- Ref. LUEP400AR: round frame – ref. 76511



LUEP400AC



LUEP400AR

## Emergency escape lighting

### Emergency lighting – SPARK Collection

**Pictogram:** screen-printed on transparent edge, 10 mm thickness – clear plexiglass.

**Frame:** mounted on accessories (recessed frame or housing) made of steel with epoxy powder-coated finish.

Other colours available on request (RAL colour of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

**Rear finish:** white diffusing film to conceal the pictogram (except double-sided version) and provide improved aesthetic finish.

### Installation type:

Edge-lit self-contained SATI emergency lighting, recessed ceiling-mounted or wall-mounted surface installation, according to the integration drawings.

Lighting also available in SATI, ADR, LSC, dual-function, BAEH or DBR versions.

**Repairability:** repairable lighting with spare parts available for 10 years.

### Technical characteristics:

- Power consumption (W): 0.52 W
- Apparent power (VA): 1.79 VA
- Supply voltage: 230 VAC
- Luminous flux: 45 lumens for 1 hour – non-maintained mode.

### Brand and model: BEHAR Sécurité – SPARK Collection

- SPEP45: recessed ceiling-mounted lighting – ref. 74200
- SPAM45: wall-mounted surface lighting – ref. 74204
- SPAP45: ceiling-mounted surface lighting – ref. 74202
- SPPM45: wall-mounted bracket (cantilever) lighting – ref. 74206
- SPDM45: wall-mounted flag lighting – ref. 74208
- SPEPFI45: recessed suspended (cable-mounted) lighting – ref. 74314
- SPAPFI45: surface-mounted suspended (cable-mounted) lighting – ref. 73318

### Integration notes:

All references are available with an 80 mm pictogram.

Suspension cable length to be defined according to project requirements and ceiling heights for each area.



SPEP45



SPAM45



SPAP45



SPPM45



SPDM45



SPEPFI45



SPAPFI45

## Ambient lighting

### Self-contained ambient lighting – SPARK Collection

**Frame:** mounted on accessories (recessed frame or housing) made of steel with epoxy powder-coated finish.

Other colours available on request (RAL colour of choice).

**Recess cut-out:** according to installation configuration (ceiling-mounted or wall-mounted).

### Installation type:

Self-contained SATI ambient lighting, recessed ceiling-mounted or wall-mounted surface installation, according to the integration drawings.

Lighting also available in SATI, ADR, LSC, dual-function, BAEH or DBR versions.

**Repairability:** repairable lighting with spare parts available for 10 years.

### Technical characteristics:

- Power consumption (W): 0.44 W
- Apparent power (VA): 2.35 VA
- Supply voltage: 230 VAC
- Luminous flux: 360 lumens for 1 hour – non-maintained mode.


### Brand and model: BEHAR Sécurité – SPARK Collection

- SPEP400: recessed ceiling-mounted lighting – ref. 74223
- SPAM400: wall-mounted surface lighting – ref. 74225
- SPAP400: ceiling-mounted surface lighting – ref. 74224
- SPPM400: wall-mounted bracket (cantilever) lighting – ref. 74219
- SPDM400: wall-mounted flag lighting – ref. 74226
- SPEPFI400: recessed suspended (cable-mounted) lighting – ref. 74315
- SPAPFI400: surface-mounted suspended (cable-mounted) lighting – ref. 74320

### Integration notes:

Suspension cable length to be defined according to project requirements and ceiling heights for each area.



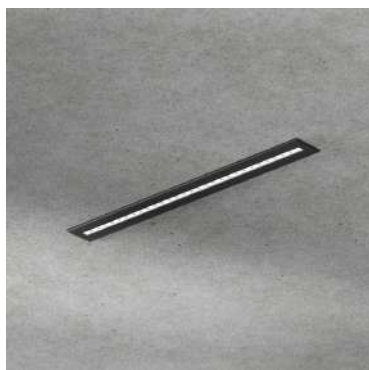

SPEP400



SPAM400




SPAP400



SPPM400



SPDM400

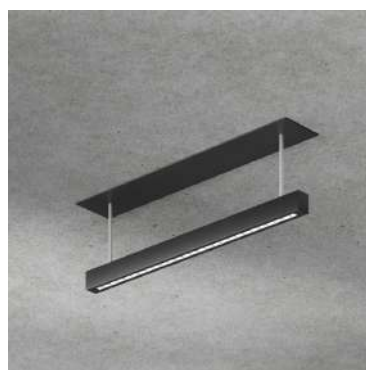

SPEPFI400



SPAPFI400

## Addressable emergency escape lighting

### Self-contained addressable emergency lighting – SPARK Collection

**Pictogram:** screen-printed on transparent edge, 10 mm thickness – clear plexiglass.

**Frame:** mounted on accessories (recessed frame or housing) made of steel with epoxy powder-coated finish.

Other colours available on request (RAL colour of choice).

**Recess cut-out:** according to installation configuration (ceiling-mounted or wall-mounted).

**Rear finish:** white diffusing film to conceal the pictogram (except double-sided version) and ensure improved aesthetic finish.

### Installation type:

Self-contained SATI ADR emergency lighting, recessed ceiling-mounted or wall-mounted surface installation, according to the integration drawings.

Lighting also available in SATI, ADR, LSC, dual-function, BAEH or DBR versions.

**Repairability:** repairable lighting with spare parts available for 10 years.

### Technical characteristics:

- Power consumption (W): 0.52 W
- Apparent power (VA): 1.79 VA
- Supply voltage: 230 VAC
- Luminous flux: 45 lumens for 1 hour – non-maintained mode.

### Brand and model: BEHAR Sécurité – SPARK Collection

- SPEP45A: recessed ceiling-mounted lighting – ref. 74350
- SPAM45A: wall-mounted surface lighting – ref. 74354
- SPAP45A: ceiling-mounted surface lighting – ref. 74352
- SPPM45A: wall-mounted bracket (cantilever) lighting – ref. 74356
- SPDM45A: wall-mounted flag lighting – ref. 74358
- SPEPFI45A: recessed suspended (cable-mounted) lighting – ref. 74317
- SPAPFI45A: surface-mounted suspended (cable-mounted) lighting – ref. 74319

### Integration notes:

All references are available with an 80 mm pictogram.

Suspension cable length to be defined according to project requirements and ceiling heights for each area.



SPEP45A



SPAM45A



SPAP45A



SPPM45A



SPDM45A



SPEPFI45A



SPAPFI45A

## **Addressable ambient lighting**

### **Self-contained addressable ambient lighting – SPARK Collection**

**Frame:** mounted on accessories (recessed frame or housing) made of steel with epoxy powder-coated finish.

Other colours available on request (RAL colour of choice).

**Recess cut-out:** according to installation configuration (ceiling-mounted or wall-mounted).

### **Installation type:**

Self-contained SATI ADR ambient lighting, recessed ceiling-mounted or wall-mounted surface installation, according to the integration drawings.

Lighting also available in SATI, ADR, LSC, dual-function, BAEH or DBR versions.

**Repairability:** repairable lighting with spare parts available for 10 years.

### **Technical characteristics:**


- Power consumption (W): 0.44 W
- Apparent power (VA): 2.35 VA
- Supply voltage: 230 VAC
- Luminous flux: 360 lumens for 1 hour – non-maintained mode.

### **Brand and model: BEHAR Sécurité – SPARK Collection**

- SPEP400A: recessed ceiling-mounted lighting – ref. 74373
- SPAM400A: wall-mounted surface lighting – ref. 74375
- SPAP400A: ceiling-mounted surface lighting – ref. 74374
- SPPM400A: wall-mounted bracket (cantilever) lighting – ref. 74377
- SPDM400A: wall-mounted flag lighting – ref. 74376
- SPEPFI400A: recessed suspended (cable-mounted) lighting – ref. 74316
- SPAPFI400A: surface-mounted suspended (cable-mounted) lighting – ref. 74321

### **Integration notes:**

Suspension cable length to be defined according to project requirements and ceiling heights for each area.

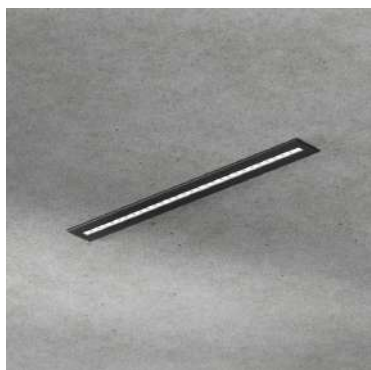

SPEP400A



SPAM400A




SPAP400A




SPPM400A



SPDM400A

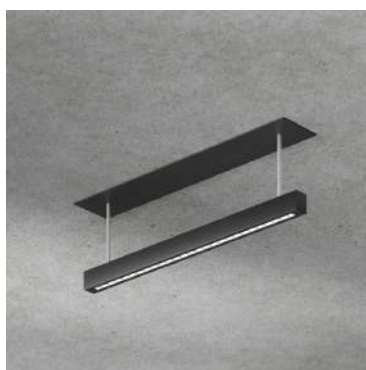

SPEPFI400A

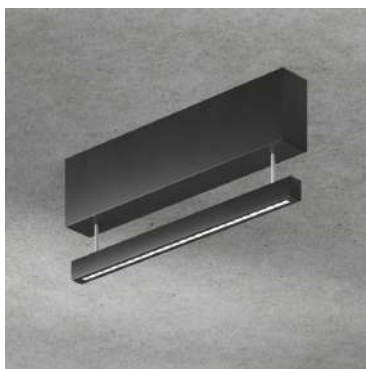

SPAPFI400A

## Central power supply emergency escape lighting

### Central power supply emergency lighting – SPARK Collection

**Pictogram:** screen-printed on transparent edge, 10 mm thickness – clear plexiglass.

**Frame:** mounted on accessories (recessed frame or housing) made of steel with epoxy powder-coated finish.

Other colours available on request (RAL colour of choice).

**Recess cut-out:** according to installation configuration (ceiling-mounted or wall-mounted).

**Rear finish:** white diffusing film to conceal the pictogram (except double-sided version) and ensure improved aesthetic finish.

### Installation type:

Central power supply emergency lighting, recessed ceiling-mounted or wall-mounted surface installation, according to the integration drawings.

Lighting also available in SATI, ADR, LSC, dual-function, BAEH or DBR versions.

**Repairability:** repairable lighting with spare parts available for 10 years.

### Technical characteristics:

- Power consumption:
  - 1.26 W at 48 VDC
  - 1.26 W at 230 VAC
- Apparent power:
  - 1.23 VA at 48 VDC
  - 2.87 VA at 230 VAC
- Supply voltage: 48 / 230 VAC–VDC
- Luminous flux: 45 lumens

### Brand and model: BEHAR Sécurité – SPARK Collection

- SPEP45SC: recessed ceiling-mounted lighting – ref. 74554
- SPAM45SC: wall-mounted surface lighting – ref. 74304
- SPAP45SC: ceiling-mounted surface lighting – ref. 74302
- SPPM45SC: wall-mounted bracket (cantilever) lighting – ref. 74312
- SPDM45SC: wall-mounted flag lighting – ref. 74306
- SPEPFI45SC: recessed suspended (cable-mounted) lighting – ref. 74325
- SPAPFI45SC: surface-mounted suspended (cable-mounted) lighting – ref. 74324

### Integration notes:

All references are available with an 80 mm pictogram.

Suspension cable length to be defined according to project requirements and ceiling heights for each area.





SPEP45SC



SPAM45SC



SPAP45SC



SPPM45SC



SPDM45SC



SPEPFI45SC



SPAPFI45SC

## Central power supply ambient lighting

### Central power supply ambient lighting – SPARK Collection

**Frame:** mounted on accessories (recessed frame or housing) made of steel with epoxy powder-coated finish.

Other colours available on request (RAL colour of choice).

**Recess cut-out:** according to installation configuration (ceiling-mounted or wall-mounted).

### Installation type:

Central power supply ambient lighting, recessed ceiling-mounted or wall-mounted surface installation, according to the integration drawings.

Lighting also available in SATI, ADR, LSC, dual-function, BAEH or DBR versions.

**Repairability:** repairable lighting with spare parts available for 10 years.

### Technical characteristics:

- Power consumption:
  - 3.83 W at 48 VDC
  - 3.71 W at 230 VAC
- Apparent power:
  - 3.83 VA at 48 VDC
  - 8.74 VA at 230 VAC
- Supply voltage: 48 / 230 VAC–VDC
- Luminous flux: 360 lumens


### Brand and model: BEHAR Sécurité – SPARK Collection

- SPEP400SC: recessed ceiling-mounted lighting – ref. 74308
- SPAM400SC: wall-mounted surface lighting – ref. 74310
- SPAP400SC: ceiling-mounted surface lighting – ref. 74309
- SPPM400SC: wall-mounted bracket (cantilever) lighting – ref. 74300
- SPDM400SC: wall-mounted flag lighting – ref. 74311
- SPEPFI400SC: recessed suspended (cable-mounted) lighting – ref. 74323
- SPAPFI400SC: surface-mounted suspended (cable-mounted) lighting – ref. 74322

### Integration notes:

Suspension cable length to be defined according to project requirements and ceiling heights for each area.



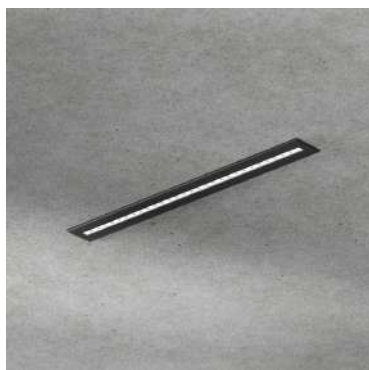

SPEP400SC



SPAM400SC




SPAP400SC




SPPM400SC



SPDM400SC

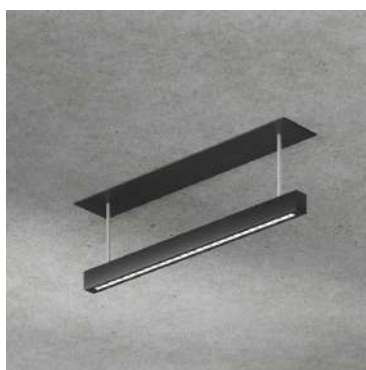

SPEPFI400SC

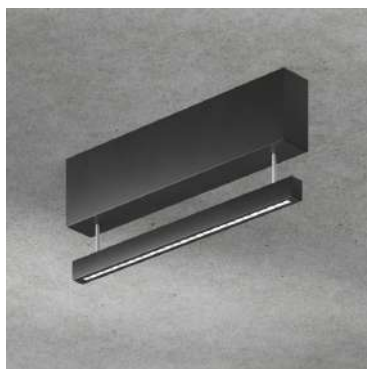

SPAPFI400SC

## Emergency escape lighting

### Self-contained emergency lighting – LOU Collection

**Pictogram:** screen-printed, 30 mm thickness – clear plexiglass.

**Frame:** lacquered steel with epoxy powder-coated finish.

Other colours available on request (RAL colour of choice).

**Recess cut-out:** according to installation configuration (ceiling-mounted or wall-mounted).

#### Installation type:

Self-contained SATI emergency lighting, recessed ceiling-mounted, surface ceiling-mounted or wall-mounted surface installation, according to the integration drawings.

Lighting also available in SATI, ADR, LSC, dual-function, BAEH or DBR versions.

**Repairability:** repairable lighting with spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.52 W
- Apparent power (VA): 1.79 VA
- Supply voltage: 230 VAC
- Luminous flux: 45 lumens for 1 hour – non-maintained mode.

#### Brand and model: BEHAR Sécurité – LOU Collection

- LOU45E: recessed ceiling-mounted lighting – ref. 10002
- LOU45S3AP: wall-mounted surface lighting – ref. 74108
- LOU45S: ceiling-mounted surface lighting – ref. 74057
- LOUDM45: wall-mounted flag lighting – ref. 74394




LOU45E



LOU45S3AP



LOU45S



LOUDM45

## Addressable emergency lighting

### Addressable self-contained emergency lighting – LOU Collection

**Pictogram:** screen-printed, 30 mm thickness – transparent plexiglass.

**Frame:** lacquered steel, epoxy paint coating.

Other colors available on request (RAL of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

SATI ADR self-contained emergency lighting, recessed ceiling installation, ceiling surface-mounted or wall-mounted, according to the integration plan.

Emergency lighting also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.7 W
- Power consumption (VA): 1.79 VA
- Supply voltage: 230 VAC
- Luminous flux: 45 lumens for 1 hour – non-maintained mode.

#### Brand and model: BEHAR Sécurité – LOU Collection.

- LOU45EA: recessed ceiling – ref. 10002
- LOU45S3APA: wall-mounted – ref. 74142
- LOU45SA: ceiling-mounted
- LOUDM45: wall flag sign – ref. 74140




LOU45EA



LOU45S3AP



LOU45SA



LOUDM45A

## Central power supply emergency lighting

### Emergency lighting with central power supply – LOU Collection

**Pictogram:** screen-printed, 30 mm thickness – transparent plexiglass.

**Frame:** lacquered steel, epoxy paint coating.

Other colors available on request (RAL of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

Emergency lighting with central power supply, recessed ceiling installation, ceiling surface-mounted or wall-mounted, according to the integration plan.

Products also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.7 W
- Power consumption (VA): 3.2 VA
- Supply voltage: 230 VAC
- Luminous flux: 45 lumens

#### Brand and model: BEHAR Sécurité – LOU Collection.

- LOU45SCE: recessed ceiling – ref. 74019
- LOU45SC3P: wall-mounted – ref. 74108
- LOU45SC: ceiling-mounted – ref. 74092
- LOUDM45SC: wall flag sign



LOU45SCE



LOU45SC3P



LOU45SC



LOUDM45SC

## Emergency evacuation lighting

### Self-contained emergency lighting – SKAPE Collection

**Pictogram:** screen-printed – transparent plexiglass.

**Frame:** aluminium.

Other colors available on request (RAL of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

### Installation type:

SATI self-contained emergency lighting, recessed ceiling installation, ceiling surface-mounted or wall-mounted, according to the integration plan. Emergency lighting also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

### Technical characteristics:

- Power consumption (W): 0.52 W
- Power consumption (VA): 1.79 VA
- Supply voltage: 230 VAC
- Luminous flux: 45 lumens for 1 hour – non-maintained mode.

### Brand and model: BEHAR Sécurité – SKAPE Collection.

- SKEP45: recessed ceiling – ref. 75600
- SKAM45: wall-mounted – ref. 75602
- SKAP45: ceiling-mounted – ref. 75657



SKEP45



SKAM45



SKAP45

## Ambient emergency lighting

### Self-contained ambient emergency lighting – SKAPE Collection

**Frame:** aluminium.

Other colors available on request (RAL of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

### Installation type:

SATI self-contained emergency lighting, recessed ceiling installation, ceiling surface-mounted or wall-mounted, according to the integration plan.

Emergency lighting also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

### Technical characteristics:

- Power consumption (W): 0.44 W
- Power consumption (VA): 2.35 VA
- Supply voltage: 230 VAC
- Luminous flux: 360 lumens for 1 hour – non-maintained mode.

### Brand and model: BEHAR Sécurité – SKAPE Collection.

- SKEP400: recessed ceiling – ref. 75615
- SKAM400: wall-mounted – ref. 75617



SKEP400



SKAM400



## Addressable emergency evacuation lighting

### Addressable self-contained emergency lighting – SKAPE Collection

**Pictogram:** screen-printed – transparent plexiglass.

**Frame:** aluminium.

Other colors available on request (RAL of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

SATI ADR self-contained emergency lighting, recessed ceiling installation, ceiling surface-mounted or wall-mounted, according to the integration plan.

Emergency lighting also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.52 W
- Power consumption (VA): 1.79 VA
- Supply voltage: 230 VAC
- Luminous flux: 45 lumens for 1 hour – non-maintained mode.

#### Brand and model: BEHAR Sécurité – SKAPE Collection.

- SKEP45A: recessed ceiling – ref. 75620
- SKAM45A: wall-mounted – ref. 75622
- SKAP45A: ceiling-mounted.



SKEP45A



SKAM45A



SKAP45A

## Addressable ambient emergency lighting

### Addressable self-contained ambient emergency lighting – SKAPE Collection

**Frame:** aluminium.

Other colors available on request (RAL of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

SATI ADR self-contained emergency lighting, recessed ceiling installation, ceiling surface-mounted or wall-mounted, according to the integration plan.

Emergency lighting also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.44 W
- Power consumption (VA): 2.35 VA
- Supply voltage: 230 VAC
- Luminous flux: 360 lumens for 1 hour – non-maintained mode.

#### Brand and model: BEHAR Sécurité – SKAPE Collection.

- SKEP400A: recessed ceiling – ref. 75635
- SKAM400A: wall-mounted – ref. 75637



SKEP400A



SKAM400A



## Central power supply emergency evacuation lighting Emergency lighting with central power supply – SKAPE Collection

**Pictogram:** screen-printed – transparent plexiglass.

**Frame:** aluminium.

Other colors available on request (RAL of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

### Installation type:

Emergency lighting with central power supply, recessed ceiling installation, ceiling surface-mounted or wall-mounted, according to the integration plan.

Products also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

### Technical characteristics:

- Power consumption (W): 1.26 W at 48 VDC – 1.26 W at 230 VAC
- Power consumption (VA): 1.23 VA at 48 VDC – 2.87 VA at 230 VAC
- Supply voltage: 48/230 VAC–VDC
- Luminous flux: 45 lumens

### Brand and model: BEHAR Sécurité – SKAPE Collection.

- SKEP45SC: recessed ceiling – ref. 75640
- SKAM45SC: wall-mounted – ref. 75642
- SKAP45SC: ceiling-mounted



SKEP45SC



SKAM45SC



SKAP45SC

## Central power supply ambient emergency lighting

### Emergency lighting with central power supply – SKAPE Collection

**Frame:** aluminium.

Other colors available on request (RAL of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

Emergency lighting with central power supply, recessed ceiling installation, ceiling surface-mounted or wall-mounted, according to the integration plan.

Products also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 3.83 W at 48 VDC – 3.71 W at 230 VAC
- Power consumption (VA): 3.83 VA at 48 VDC – 8.74 VA at 230 VAC
- Supply voltage: 48/230 VAC–VDC
- Luminous flux: 360 lumens

#### Brand and model: BEHAR Sécurité – SKAPE Collection.

- SKEP400SC: recessed ceiling – ref. 75645
- SKAM400SC: wall-mounted – ref. 75647



SKEP400SC



SKAM400SC

## Emergency evacuation lighting

### Self-contained emergency lighting – VISTA CINEMA Collection

**Pictogram:** screen-printed – plexiglass – optical system eliminating disturbing stray light.

**Frame:** lacquered steel.

Other colors available on request (RAL of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

### Installation type:

SATI self-contained emergency lighting, ceiling surface-mounted or wall-mounted, according to the integration plan.

**Repairability:** repairable device; spare parts available for 10 years.

### Technical characteristics:

- Power consumption (W): 0.52 W
- Power consumption (VA): 1.79 VA
- Supply voltage: 230 VAC
- Luminous flux: 45 lumens for 1 hour – non-maintained mode.

### Brand and model: BEHAR Sécurité – VISTA CINEMA Collection.

- VISTA2LCINEMA: wall-mounted – ref. 33503
- VISTA2LCINEMAP: ceiling-mounted – ref. 74587



VISTA2LCINEMA



VISTA2LCINEMAP

## Central power supply emergency evacuation lighting

### Emergency lighting with central power supply – VISTA CINEMA Collection

**Pictogram:** screen-printed – plexiglass – optical system eliminating disturbing stray light.

**Frame:** lacquered steel.

Other colors available on request (RAL of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

Emergency lighting with central power supply, ceiling surface-mounted or wall-mounted, according to the integration plan.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 1.26 W at 48 VDC – 1.26 W at 230 VAC
- Power consumption (VA): 1.23 VA at 48 VDC – 2.87 VA at 230 VAC
- Supply voltage: 48/230 VAC–VDC
- Luminous flux: 45 lumens

#### Brand and model: BEHAR Sécurité – VISTA CINEMA Collection.

- VISTASCCINEMA: wall-mounted – ref. 33500
- VISTASCCINEMAP: ceiling-mounted – ref. 74586



VISTASCCINEMA



VISTASCCINEMAP

## Emergency evacuation lighting

### Self-contained emergency lighting – STAR Collection

**Pictogram:** screen-printed – plexiglass.

**Frame:** lacquered steel.

Other colors available on request (RAL of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

SATI self-contained emergency lighting, recessed wall installation or wall-mounted, according to the integration plan.

Emergency lighting also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.49 W
- Power consumption (VA): 1.55 VA
- Supply voltage: 230 VAC
- Luminous flux: 45 lumens for 1 hour – non-maintained mode.

#### Brand and model: BEHAR Sécurité – STAR Collection.

- STAREL: recessed wall-mounted – ref. 43474
- STARRE: recessed wall-mounted – ref. 43500
- STARLET: weatherproof wall-mounted – ref. 74386
- STARR2GP: wall-mounted – ref. 74136
- STARR2: wall-mounted – ref. 74120



STAREL



STARRE



STARLET



STARR2GP



STARR2

## Ambient emergency lighting

### Self-contained ambient emergency lighting – STAR Collection

**Frame:** lacquered steel.

Other colors available on request (RAL of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

### Installation type:

SATI self-contained emergency lighting, ceiling surface-mounted, according to the integration plan.

**Repairability:** repairable device; spare parts available for 10 years.

### Technical characteristics:

- Power consumption (W): 0.42 W
- Power consumption (VA): 3.8 VA
- Supply voltage: 230 VAC
- Luminous flux: 500 lumens for 1 hour – non-maintained mode.

### Brand and model: BEHAR Sécurité – STAR Collection.

- STARAMB: ceiling-mounted – ref. 43493



STARAMB

## Central power supply emergency evacuation lighting Emergency lighting with central power supply – STAR Collection

**Pictogram:** screen-printed – plexiglass.

**Frame:** lacquered steel.

Other colors available on request (RAL of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

### Installation type:

Emergency lighting with central power supply, recessed wall installation or wall-mounted, according to the integration plan.

**Repairability:** repairable device; spare parts available for 10 years.

### Technical characteristics:

- Power consumption (VA): 1.15 VA at 48 VDC – 5.30 VA at 230 VAC
- Power consumption (W): 1.15 W at 48 VDC – 1.30 W at 230 VAC
- Supply voltage: 48/230 VAC–VDC
- Luminous flux: 45 lumens

### Brand and model: BEHAR Sécurité – STAR Collection.

- STAR1EEL: recessed wall-mounted – ref. 33376
- STAR1RE: recessed wall-mounted – ref. 44501
- STAR1LET: weatherproof wall-mounted – ref. 43495
- STAR1R2GP: wall-mounted – ref. 74582
- STAR1R2: wall-mounted – ref. 74122



STARREL



STARRE



STARLET



STARR2GP



STARR2

## Central power supply ambient emergency lighting

### Emergency lighting with central power supply – STAR Collection

**Frame:** lacquered steel.

Other colors available on request (RAL of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

Emergency lighting with central power supply, ceiling surface-mounted, according to the integration plan.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 3.56 W at 48 VDC – 3.80 W at 230 VAC
- Power consumption (VA): 3.56 VA at 48 VDC – 9.80 VA at 230 VAC
- Supply voltage: 48/230 VAC–VDC
- Luminous flux: 500 lumens

#### Brand and model: BEHAR Sécurité – STAR Collection.

- STAR360SC: ceiling-mounted – ref. 33377



STAR360SC



## Emergency evacuation lighting

### Self-contained emergency lighting – CYLINDRIK Collection

**Pictogram:** removable label.

**Frame:** stainless steel.

Other colors available on request (RAL of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

SATI self-contained emergency lighting, wall-mounted, ceiling surface-mounted, or wall flag-mounted, according to the integration plan.

Emergency lighting also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Unit length:** 260 mm or 310 mm.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.52 W
- Power consumption (VA): 1.79 VA
- Supply voltage: 230 VAC
- Luminous flux: 45 lumens for 1 hour – non-maintained mode.

#### Brand and model: BEHAR Sécurité – CYLINDRIK Collection.

- CYE60L: ceiling- or wall-mounted – ref. 43260
- CYEE.A: wall flag sign – ref. 43600



CYE60L



CYEE.A

## Ambient emergency lighting

### Self-contained ambient emergency lighting – CYLINDRIK Collection

**Frame:** stainless steel.

Other colors available on request (RAL of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

SATI self-contained emergency lighting, wall-mounted, ceiling surface-mounted, or wall flag-mounted, according to the integration plan.

Emergency lighting also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Unit length:** 260 mm or 310 mm.


**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.42 W
- Power consumption (VA): 3.8 VA
- Supply voltage: 230 VAC
- Luminous flux: 500 lumens for 1 hour – non-maintained mode

#### Brand and model: BEHAR Sécurité – CYLINDRIK Collection.

- CYE340: ceiling-mounted – ref. 43259

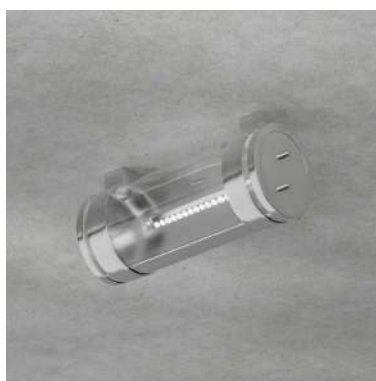

CYE340

## Addressable emergency evacuation lighting

### Addressable self-contained emergency lighting – CYLINDRIK Collection

**Pictogram:** removable label.

**Frame:** stainless steel.

Other colors available on request (RAL of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

SATI ADR self-contained emergency lighting, wall-mounted, ceiling surface-mounted, or wall flag-mounted, according to the integration plan.

Emergency lighting also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Unit length:** 260 mm or 310 mm.


**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.52 W
- Power consumption (VA): 1.79 VA
- Supply voltage: 230 VAC
- Luminous flux: 45 lumens for 1 hour – non-maintained mode.

#### Brand and model: BEHAR Sécurité – CYLINDRIK Collection.

- CYE60ADR: ceiling- or wall-mounted – ref. 53258
- CYEE.AA: wall flag sign

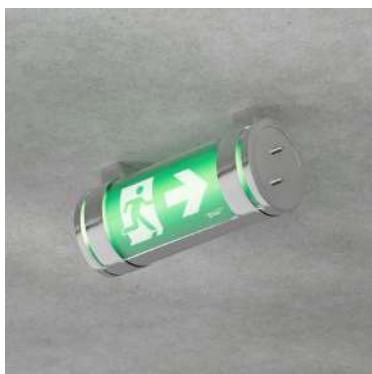

CYE60ADR



CYEE.AA

## Addressable ambient emergency lighting

### Addressable self-contained ambient emergency lighting – CYLINDRIK Collection

**Frame:** stainless steel.

Other colors available on request (RAL of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

SATI ADR self-contained emergency lighting, wall-mounted, ceiling surface-mounted, or wall flag-mounted, according to the integration plan.

Emergency lighting also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Unit length:** 260 mm or 310 mm.


**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.42 W
- Power consumption (VA): 3.8 VA
- Supply voltage: 230 VAC
- Luminous flux: 500 lumens for 1 hour – non-maintained mode.

#### Brand and model: BEHAR Sécurité – CYLINDRIK Collection.

- CYE340ADR: ceiling-mounted – ref. 74090

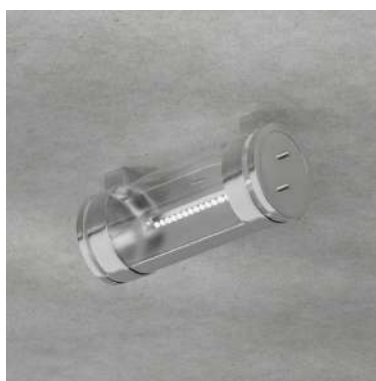

CYE340ADR

## Central power supply emergency evacuation lighting

### Emergency lighting with central power supply – CYLINDRIK Collection

**Pictogram:** removable label.

**Frame:** stainless steel.

Other colors available on request (RAL of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

Emergency lighting with central power supply, wall-mounted, ceiling surface-mounted, or wall flag-mounted, according to the integration plan.

Products also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Unit length:** 260 mm or 310 mm.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 1.26 W at 48 VDC – 1.26 W at 230 VAC
- Power consumption (VA): 1.23 VA at 48 VDC – 2.87 VA at 230 VAC
- Supply voltage: 48/230 VAC–VDC
- Luminous flux: 45 lumens

#### Brand and model: BEHAR Sécurité – CYLINDRIK Collection.

- CYE45SC: ceiling- or wall-mounted – ref. 74098
- CYEE.SC: wall flag sign – ref. 43601



CYE45SC



CYEE.SC

## Central power supply ambient emergency lighting

### Emergency lighting with central power supply – CYLINDRIK Collection

**Frame:** stainless steel.

Other colors available on request (RAL of choice).

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

Emergency lighting with central power supply, wall-mounted, ceiling surface-mounted, or wall flag-mounted, according to the integration plan.

Products also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Unit length:** 260 mm or 310 mm.


**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 3.56 W at 48 VDC – 3.80 W at 230 VAC
- Power consumption (VA): 3.56 VA at 48 VDC – 9.80 VA at 230 VAC
- Supply voltage: 48/230 VAC–VDC
- Luminous flux: 500 lumens

#### Brand and model: BEHAR Sécurité – CYLINDRIK Collection.

- CYE360SC: ceiling-mounted – ref. 74099

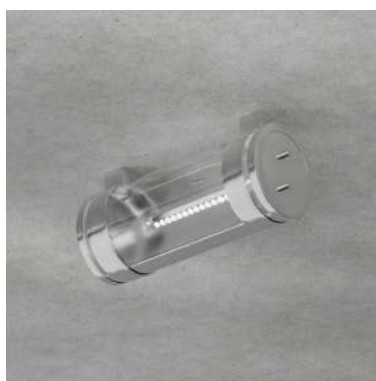



CYE360SC

## Emergency evacuation lighting

### Self-contained emergency lighting – KNOPE Collection

**Pictogram:** screen-printed.

**Frame:** solid oak wood.



#### Installation type:

SATI self-contained emergency lighting, wall-mounted, ceiling surface-mounted, or wall flag-mounted, according to the integration plan.

Emergency lighting also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.52 W
- Power consumption (VA): 1.79 VA
- Supply voltage: 230 VAC
- Luminous flux: 45 lumens for 1 hour – non-maintained mode.

#### Brand and model: BEHAR Sécurité – KNOPE Collection.

- KNAM45: wall-mounted – ref. 76000
- KNAP45: ceiling-mounted – ref. 76011
- KNDM45: wall flag sign – ref. 76019



KNAM45



KNAP45




KNDM45

## Ambient emergency lighting

### Self-contained ambient emergency lighting – KNOPE Collection

**Pictogram:** screen-printed.

**Frame:** solid oak wood.

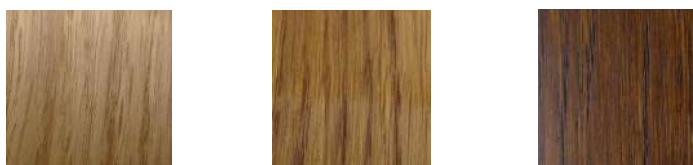

### Installation type:

SATI self-contained emergency lighting, wall-mounted, ceiling surface-mounted, or wall flag-mounted, according to the integration plan.

Emergency lighting also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

### Technical characteristics:

- Power consumption (W): 0.44 W
- Power consumption (VA): 2.35 VA
- Supply voltage: 230 VAC
- Luminous flux: 360 lumens for 1 hour – non-maintained mode.

### Brand and model: BEHAR Sécurité – KNOPE Collection.

- KN400: ceiling-mounted – ref. 76013



KN400





## Addressable emergency evacuation lighting

### Addressable self-contained emergency lighting – KNOPE Collection

**Pictogram:** screen-printed.

**Frame:** solid oak wood.



#### Installation type:

SATI ADR self-contained emergency lighting, wall-mounted, ceiling surface-mounted, or wall flag-mounted, according to the integration plan.

Emergency lighting also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.52 W
- Power consumption (VA): 1.79 VA
- Supply voltage: 230 VAC
- Luminous flux: 45 lumens for 1 hour – non-maintained mode.

#### Brand and model: BEHAR Sécurité – KNOPE Collection.

- KNAM45A: wall-mounted – ref. 76016
- KNAP45A: ceiling-mounted – ref. 76024
- KNDM45A: wall flag sign – ref. 76018



KNAM45A



KNAP45A




KNDM45A

## Addressable ambient emergency lighting

### Addressable self-contained ambient emergency lighting – KNOPE Collection

**Pictogram:** screen-printed.

**Frame:** solid oak wood.



## Installation type:

SATI ADR self-contained emergency lighting, wall-mounted, ceiling surface-mounted, or wall flag-mounted, according to the integration plan.

Emergency lighting also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

## Technical characteristics:

- Power consumption (W): 0.44 W
- Power consumption (VA): 2.35 VA
- Supply voltage: 230 VAC
- Luminous flux: 360 lumens for 1 hour – non-maintained mode.

## Brand and model: BEHAR Sécurité – KNOPE Collection.

- KN400A: ceiling-mounted – ref. 76012





KN400A

## Central power supply emergency evacuation lighting

### Emergency lighting with central power supply – KNOPE Collection

**Pictogram:** screen-printed.

**Frame:** solid oak wood.



#### Installation type:

Emergency lighting with central power supply, wall-mounted, ceiling surface-mounted, or wall flag-mounted, according to the integration plan.

Products also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 1.26 W at 48 VDC – 1.26 W at 230 VAC
- Power consumption (VA): 1.23 VA at 48 VDC – 2.87 VA at 230 VAC
- Supply voltage: 48/230 VAC–VDC
- Luminous flux: 45 lumens

#### Brand and model: BEHAR Sécurité – KNOPE Collection.

- KNAM45SC: wall-mounted – ref. 76004
- KNAP45SC: ceiling-mounted – ref. 76026
- KNDM45SC: wall flag sign – ref. 76020



KNAM45SC



KNAP45SC




KNDM45SC

## Central power supply ambient emergency lighting

### Emergency lighting with central power supply – KNOPE Collection

**Pictogram:** screen-printed.

**Frame:** solid oak wood.

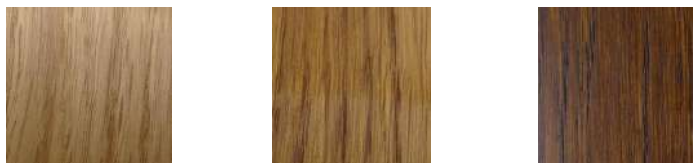

#### Installation type:

Emergency lighting with central power supply, wall-mounted, ceiling surface-mounted, or wall flag-mounted, according to the integration plan.

Products also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 3.83 W at 48 VDC – 3.71 W at 230 VAC
- Power consumption (VA): 3.83 VA at 48 VDC – 8.74 VA at 230 VAC
- Supply voltage: 48/230 VAC–VDC
- Luminous flux: 360 lumens

#### Brand and model: BEHAR Sécurité – KNOPE Collection.

- KN400SC: ceiling-mounted – ref. 76014



KN400SC

## Emergency evacuation lighting

### Self-contained emergency lighting – CLAS Collection

**Pictogram:** screen-printed.

**Frame:** lacquered steel.

Other colors available on request (RAL of choice).

### Installation type:

SATI self-contained emergency lighting, wall-mounted, ceiling surface-mounted, or wall flag-mounted, according to the integration plan.

Emergency lighting also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

### Technical characteristics:

- Power consumption (W): 0.49 W
- Power consumption (VA): 1.8 VA
- Supply voltage: 230 VAC
- Luminous flux: 45 lumens for 1 hour – non-maintained mode.

### Brand and model: BEHAR Sécurité – CLAS Collection.

- CLAM45: wall-mounted
- CLAP45: ceiling-mounted
- CLDM45: wall flag sign



CLAM45



CLAP45



CLDM45

## Ambient emergency lighting

### Self-contained ambient emergency lighting – CLAS Collection

**Frame:** lacquered steel.

Other colors available on request (RAL of choice).

### Installation type:

SATI self-contained emergency lighting, ceiling surface-mounted, according to the integration plan. Also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.


**Repairability:** repairable device; spare parts available for 10 years.

### Technical characteristics:

- Power consumption (W): 0.49 W
- Power consumption (VA): 1.8 VA
- Supply voltage: 230 VAC
- Luminous flux: 360 lumens for 1 hour – non-maintained mode.

**Brand and model: BEHAR Sécurité – CLAS Collection.**

- CLAMP400: ceiling-mounted

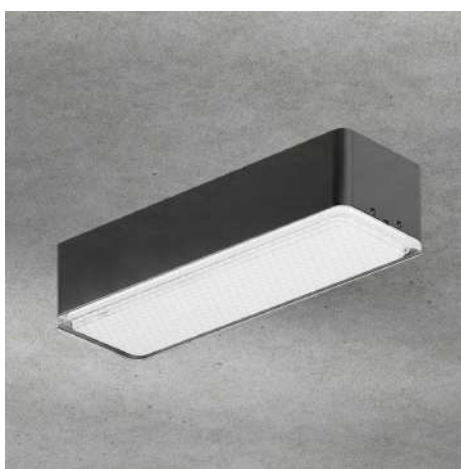

CLAMP400

## Addressable emergency evacuation lighting

### Addressable self-contained emergency lighting – CLAS Collection

**Pictogram:** screen-printed.

**Frame:** lacquered steel.

Other colors available on request (RAL of choice).

#### Installation type:

SATI ADR self-contained emergency lighting, wall-mounted, ceiling surface-mounted, or wall flag-mounted, according to the integration plan.

Also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.49 W
- Power consumption (VA): 1.8 VA
- Supply voltage: 230 VAC
- Luminous flux: 45 lumens for 1 hour – non-maintained mode.

#### Brand and model: BEHAR Sécurité – CLAS Collection.

- CLAM45A: wall-mounted
- CLAP45A: ceiling-mounted
- CLDM45A: wall flag sign



CLAM45A



CLAP45A



CLDM45A



## Addressable ambient emergency lighting

### Addressable self-contained ambient emergency lighting – CLAS Collection

**Frame:** lacquered steel.

Other colors available on request (RAL of choice).

#### Installation type:

SATI ADR self-contained emergency lighting, ceiling surface-mounted, according to the integration plan.

Also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.


**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.49 W
- Power consumption (VA): 1.8 VA
- Supply voltage: 230 VAC
- Luminous flux: 360 lumens for 1 hour – non-maintained mode.

#### Brand and model: BEHAR Sécurité – CLAS Collection.

- CLAMP400A: ceiling-mounted

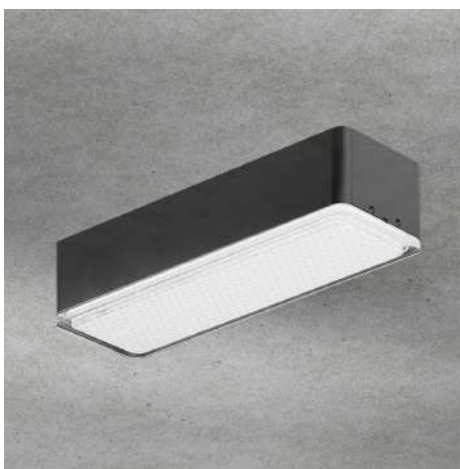

CLAMP400A

## Central power supply emergency evacuation lighting

### Emergency lighting with central power supply – CLAS Collection

**Pictogram:** screen-printed.

**Frame:** lacquered steel.

Other colors available on request (RAL of choice).

#### Installation type:

Emergency lighting with central power supply, wall-mounted, ceiling surface-mounted, or wall flag-mounted, according to the integration plan.

Also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): DC: 1.15 W / AC: 1.30 W
- Power consumption (VA): DC: 1.15 VA / AC: 5.30 VA
- Supply voltage: 48/230 VAC–VDC
- Luminous flux: 45 lumens

#### Brand and model: BEHAR Sécurité – CLAS Collection.

- CLAM45SC: wall-mounted
- CLAP45SC: ceiling-mounted
- CLDM45SC: wall flag sign



CLAM45SC



CLAP45SC



CLDM45SC

## Central power supply ambient emergency lighting

### Emergency lighting with central power supply – CLAS Collection

**Frame:** lacquered steel.

Other colors available on request (RAL of choice).

#### Installation type:

Emergency lighting with central power supply, ceiling surface-mounted, according to the integration plan.

Also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.


**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): DC: 3.56 W / AC: 3.80 W
- Power consumption (VA): DC: 3.56 VA / AC: 9.80 VA
- Supply voltage: 48/230 VAC–VDC
- Luminous flux: 360 lumens

#### Brand and model: BEHAR Sécurité – CLAS Collection.

- CLAMP400SC: ceiling-mounted

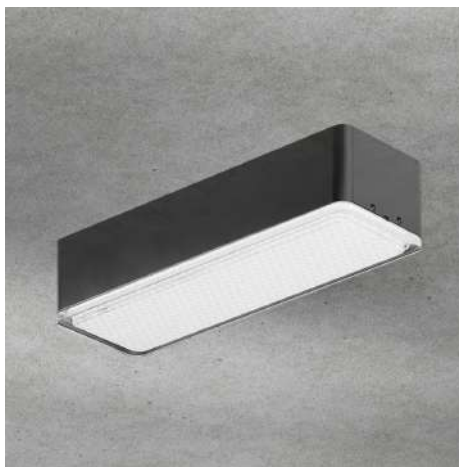

CLAMP400SC

## Emergency evacuation lighting

### Self-contained emergency lighting – Eclat<sup>2</sup> Collection

**Pictogram:** removable label.

**Frame:** 95% recycled plastic – PMMA.

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

SATI self-contained emergency lighting, recessed wall-mounted, recessed ceiling-mounted, ceiling surface-mounted, and wall surface-mounted, according to the integration plan.

Also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.49 W
- Power consumption (VA): 1.55 VA
- Supply voltage: 230 VAC
- Luminous flux: 45 lumens for 1 hour – non-maintained mode.

#### Brand and model: BEHAR Sécurité – Eclat<sup>2</sup> Collection.

- BA85RLO2: recessed wall-mounted – ref. 37922 (available in waterproof version)
- BA60LO2: wall-mounted – ref. 37909 (available in waterproof version)
- BA60GLO2: wall-mounted with grille – ref. 37971 (available in waterproof version)



BA85RLO2



BA60LO2



BA60GLO2

## Ambient emergency lighting

### Self-contained ambient emergency lighting – Eclat<sup>2</sup> Collection

**Frame:** 95% recycled plastic – PMMA.

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

SATI self-contained emergency lighting, recessed wall-mounted, recessed ceiling-mounted, ceiling surface-mounted, and wall surface-mounted, according to the integration plan.

Also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.


**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.49 W
- Power consumption (VA): 1.55 VA
- Supply voltage: 230 VAC
- Luminous flux: 360 lumens for 1 hour – non-maintained mode.

#### Brand and model: BEHAR Sécurité – Eclat<sup>2</sup> Collection.


- BH85RLO2: recessed ceiling-mounted – ref. 37923 (available in waterproof version)
- BH10LO2: wall/ceiling-mounted – ref. 37912 (available in waterproof version)
- BA450G: wall/ceiling-mounted with grille – ref. 37917 (available in waterproof version)

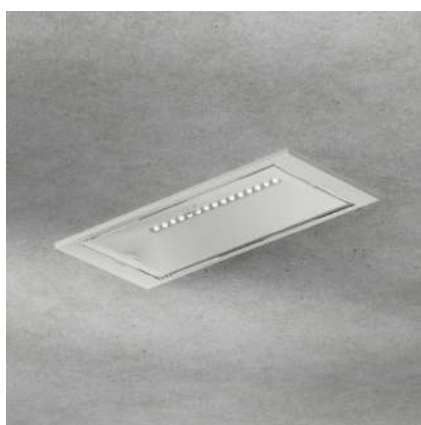

BH85RLO2



BH10LO2

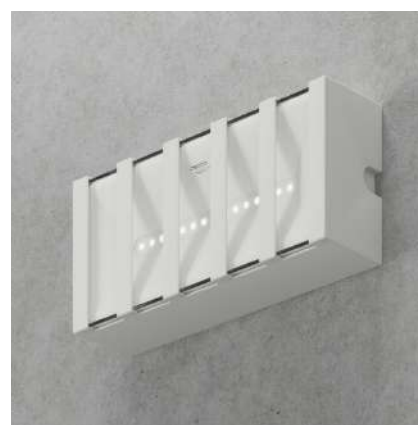

BA450G

## Addressable emergency evacuation lighting

### Addressable self-contained emergency lighting – Eclat<sup>2</sup> Collection

**Pictogram:** removable label.

**Frame:** 95% recycled plastic – PMMA.

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

SATI ADR self-contained emergency lighting, recessed wall-mounted, recessed ceiling-mounted, ceiling surface-mounted, and wall surface-mounted, according to the integration plan.

Also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.49 W
- Power consumption (VA): 1.55 VA
- Supply voltage: 230 VAC
- Luminous flux: 45 lumens for 1 hour – non-maintained mode.

#### Brand and model: BEHAR Sécurité – Eclat<sup>2</sup> Collection.

- BA85RLA2: recessed wall-mounted (available in waterproof version)
- BA60LA2: wall-mounted – ref. 34600 (available in waterproof version)
- BA60GLA2: wall-mounted with grille – ref. 36203 (available in waterproof version)



BA85RLA2



BA60LA2



BA60GLA2

## **Addressable ambient emergency lighting**

### **Addressable self-contained ambient emergency lighting – Eclat<sup>2</sup> Collection**

**Frame:** 95% recycled plastic – PMMA.

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### **Installation type:**

SATI ADR self-contained emergency lighting, recessed wall-mounted, recessed ceiling-mounted, ceiling surface-mounted, and wall surface-mounted, according to the integration plan.

Also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

#### **Technical characteristics:**

- Power consumption (W): 0.49 W
- Power consumption (VA): 1.55 VA
- Supply voltage: 230 VAC
- Luminous flux: 360 lumens for 1 hour – non-maintained mode.

#### **Brand and model: BEHAR Sécurité – Eclat<sup>2</sup> Collection.**

- BA500LA: wall/ceiling-mounted – ref. 34602 (available in waterproof version)



BA500LA



## Central power supply emergency evacuation lighting

### Emergency lighting with central power supply – Eclat<sup>2</sup> Collection

**Pictogram:** removable label.

**Frame:** 95% recycled plastic – PMMA.

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

Emergency lighting with central power supply, recessed wall-mounted, recessed ceiling-mounted, ceiling surface-mounted, and wall surface-mounted, according to the integration plan. Also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 1.15 W at 48 VDC – 1.30 W at 230 VAC
- Power consumption (VA): 1.15 VA at 48 VDC – 5.30 VA at 230 VAC
- Supply voltage: 48/230 VAC–VDC
- Luminous flux: 45 lumens

#### Brand and model: BEHAR Sécurité – Eclat<sup>2</sup> Collection.

- CSP85R2: recessed wall-mounted – ref. 75069 (available in waterproof version)
- CSPEL2: wall-mounted – ref. 40654 (available in waterproof version)
- CSPGSL2: wall-mounted with grille – ref. 75063 (available in waterproof version)



CSP85R2



CSPEL2



CSPGSL2

## Central power supply ambient emergency lighting

### Emergency lighting with central power supply – Eclat<sup>2</sup> Collection

**Frame:** 95% recycled plastic – PMMA.

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

Emergency lighting with central power supply, recessed wall-mounted, recessed ceiling-mounted, ceiling surface-mounted, and wall surface-mounted, according to the integration plan. Also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:


- Power consumption (W): 3.56 W at 48 VDC – 3.80 W at 230 VAC
- Power consumption (VA): 3.56 VA at 48 VDC – 9.80 VA at 230 VAC
- Supply voltage: 48/230 VAC–VDC
- Luminous flux: 360 lumens

#### Brand and model: BEHAR Sécurité – Eclat<sup>2</sup> Collection.

- CSAL2: wall/ceiling-mounted – ref. 40655 (available in waterproof version)
- CSA85R2: recessed ceiling-mounted – ref. 75071



CSAL2

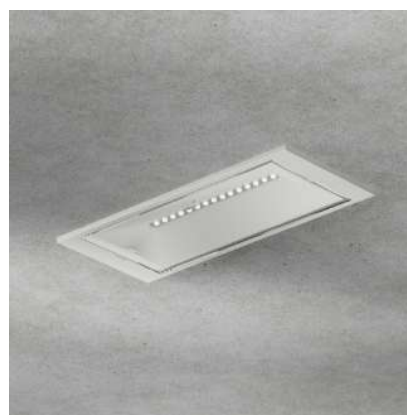

CSA85R2

# CCTP - ÉCLAT<sup>2</sup> collection

---

## ECLAT<sup>2</sup> collection accessory

Painted steel trim




Ceiling mounting bracket



Wall flag mounting bracket



Floor-mounted post

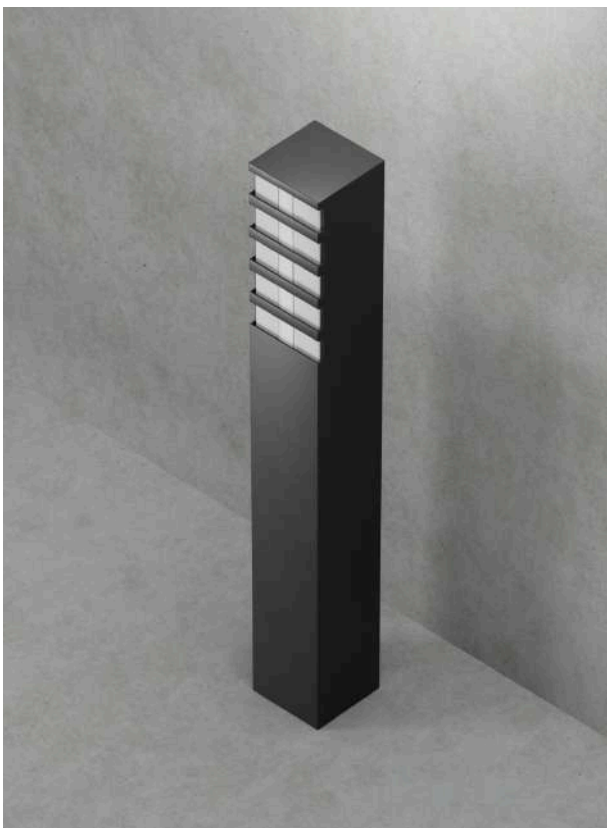

## Emergency evacuation lighting

### Self-contained emergency lighting – Eclat<sup>2</sup> Collection

**Pictogram:** removable label.

**Frame:** 95% recycled plastic – PMMA.

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

SATI self-contained emergency lighting, recessed wall-mounted, recessed ceiling-mounted, ceiling surface-mounted, and wall surface-mounted, according to the integration plan.

Also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.49 W
- Power consumption (VA): 1.55 VA
- Supply voltage: 230 VAC
- Luminous flux: 45 lumens for 1 hour – non-maintained mode.

#### Brand and model: BEHAR Sécurité – Eclat<sup>2</sup> Collection.

- BA60NLO2: recessed ceiling-mounted – ref. 37946 (available in waterproof version)
- BA16NSO2: ceiling surface-mounted – ref. 37958 (available in waterproof version)



BA60NSLO2



BA16NSO2

## Addressable emergency evacuation lighting

### Addressable self-contained emergency lighting – Eclat<sup>2</sup> Collection

**Pictogram:** removable label.

**Frame:** 95% recycled plastic – PMMA.

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

SATI ADR self-contained emergency lighting, recessed wall-mounted, recessed ceiling-mounted, ceiling surface-mounted, and wall surface-mounted, according to the integration plan. Also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 0.49 W
- Power consumption (VA): 1.55 VA
- Supply voltage: 230 VAC
- Luminous flux: 45 lumens for 1 hour – non-maintained mode.

#### Brand and model: BEHAR Sécurité – Eclat<sup>2</sup> Collection.

- BA60NLA2: recessed ceiling-mounted – ref. 37955 (available in waterproof version)
- AET60NSLA2: ceiling surface-mounted – ref. 37960 (available in waterproof version)



BA60NLA2



AET60NSLA2

## Central power supply emergency evacuation lighting

### Emergency lighting with central power supply – Eclat<sup>2</sup> Collection

**Pictogram:** removable label.

**Frame:** 95% recycled plastic – PMMA.

**Recess cut-out:** according to installation configuration (ceiling or wall-mounted).

#### Installation type:

Emergency lighting with central power supply, recessed wall-mounted, recessed ceiling-mounted, ceiling surface-mounted, and wall surface-mounted, according to the integration plan. Also available in SATI, ADR, LSC, dual-function, BAEH, or DBR versions.

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 1.15 W at 48 VDC – 1.30 W at 230 VAC
- Power consumption (VA): 1.15 VA at 48 VDC – 5.30 VA at 230 VAC
- Supply voltage: 48/230 VAC–VDC
- Luminous flux: 45 lumens

#### Brand and model: BEHAR Sécurité – Eclat<sup>2</sup> Collection.

- CSPENL2: recessed ceiling-mounted – ref. 75062 (available in waterproof version)
- CSPENSL2: ceiling surface-mounted – ref. 75074 (available in waterproof version)



CSPENL2



CSPENSL2

# CCTP - PHARE collection

---

## SATI & ADR ambient lighting

### SATI and addressable self-contained ambient lighting – Phare Collection

**Frame:** 95% recycled plastic – PMMA – Waterproof

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 1.5 W
- Power consumption (VA): 11 VA
- Supply voltage: 230 VAC
- Luminous flux: 2400 lumens for 1 hour – non-maintained mode



#### Brand and model: BEHAR Sécurité – Phare Collection

- BAPHL: ceiling surface-mounted – ref. 73120 (SATI version)
- BAPHLADR: ceiling surface-mounted – ref. 73121 (addressable version)

---

## Central power supply ambient lighting

### Ambient lighting with central power supply – Phare Collection

**Frame:** Aluminium

**Repairability:** repairable device; spare parts available for 10 years.

#### Technical characteristics:

- Power consumption (W): 51.6 W
- Power consumption (VA): 57.12 VA
- Supply voltage: 230 VAC
- Luminous flux: 5400 lumens

#### Brand and model: BEHAR Sécurité – Phare Collection

- PRO45L: ceiling surface-mounted – ref. 74101





# CCTP - BAPI

---

The electrical technical rooms will be equipped with Individual Portable Self-Contained Units, such as: the Main Low Voltage Switchboard Room (TGBT).



## BAPI Characteristics:

- Luminous flux: 300 lumens (LED source)
- Class: II
- Equipped with Ni-Cd rechargeable batteries
- IP rating: 55 / IK rating: 08
- Type: BAPI L (ref. 33502)
- Brand: BEHAR or equivalent

# CCTP - Remote control

---

## Centralized Management Remote Control – CTM Series

### Main Function:

- Centralized standby mode for self-contained units in the event of a deliberate mains power cut.

### Maintenance and Operation:

- Facilitates maintenance operations and periodic inspections.
- Allows immediate identification of a faulty emergency unit via an integrated LED indicator.
- Ensures quick monitoring of equipment status on the control line.

### Functional Characteristics:

- System equipped with a “fault reporting” function, signaling any unit with an anomaly on the dedicated line.
- Compatible with all emergency units connected to the management network.

### Brand and Models:

- BEHAR Sécurité – CTM5 (ref. 33528)
- BEHAR Sécurité – CTM6 (ref. 33529)

Or a technically equivalent model providing the same functionalities.



# CCTP - Addressable System

---

The facility will be equipped with addressable self-contained emergency lighting units. The installation will include one or more management panels with DiCube consoles, with a maximum of 1,280 units per panel.

There is no limit to the number of panels within a building; the total number must be configured to meet the zoning requirements specified by the operator.

The emergency lighting will provide two key functions:

1. Evacuation lighting for both able-bodied individuals and persons with reduced mobility.
2. Ambient lighting.

Thanks to periodic inspections, the solution will:

- ensure optimal maintenance of the safety installation,
- comply with legal and regulatory requirements.

The emergency lighting will be provided by self-contained units compliant with standards EN 60 598-2-22 and UTE C 71-820.

The rechargeable batteries of the units will be guaranteed cadmium-free, of the long-life LiFePO4 type.



In order to ensure rapid evacuation, the addressable emergency lighting system shall incorporate the “Visibility +” function: upon activation of a fire alarm while the mains supply is present, all emergency lighting units within the building shall switch to flashing mode, thereby enhancing the visibility of evacuation signage.

# CCTP - Addressable System

---

These Emergency Lighting Units shall be of addressable SATI technology, approved for the “NF AEAS performance SATI” certification, of BEHAR brand or technically equivalent.

They shall comply with UTE C 71.820 and shall perform automatic periodic tests, in accordance with Article EC 14 of the safety regulations. In addition, they shall carry out continuous monitoring of the charge indicator and battery charging status.

The day and time of testing for each unit shall be automatically scheduled from the central management unit and may be manually adjusted. This function shall ensure that two adjacent units do not perform tests simultaneously.

System monitoring shall be possible using a computer, tablet, or smartphone.

Each emergency lighting unit shall be assigned a unique address, allowing it to be identified and located. Addressing may be carried out automatically or unit by unit, depending on requirements. All unit monitoring data shall be transmitted to the supervision system, in local or remote mode (address, operating status, charging status, periodic test log, etc.).

Through the management central unit, which automatically performs functional and autonomy tests, all connected devices shall be continuously monitored. The central unit shall be of the HUB DiCube type, by BEHAR or technically equivalent.

The system shall allow simple expansion of the number of monitored devices by adding a console. This console shall be of the DiCube Console type, by BEHAR or technically equivalent.

The status indication of the emergency lighting units (BAES) shall be displayed by the LEDs on each unit:

- Green: unit OK
- Yellow steady: battery fault
- Yellow flashing: electronic fault

Activation of the systems and devices shall be simple and intuitive, using a laser pointer and an optical sensor of the VLDP type, by BEHAR or technically equivalent.

Installation and commissioning of the system shall be simple and flexible through the use of embedded web pages within the DiCube Hub or technically equivalent.

The system may be controlled via WiFi or Ethernet network in order to facilitate configuration, commissioning, monitoring, and maintenance of the emergency lighting units. To simplify site operation and maintenance, the system shall be capable of generating periodic reports on the operating status of the units.

# CCTP - Addressable System

The addressable emergency lighting system shall allow integration and data feedback into BMS/GTB, Web, KNX, and Cloud architectures, where applicable on the building, via open and interoperable protocols such as Modbus TCP/IP or BACnet IP.

Communication between the emergency lighting units and the central management unit shall be carried out using the DALI protocol.


The remote control function of the emergency lighting units shall be integrated into the DiCube consoles, enabling the units to be switched off or switched back on in the event of intentional power outages.



## Principle diagram

### DiCube Smart System - l'offre Adressable

Supervision de l'ensemble des blocs depuis le réseau d'entreprise

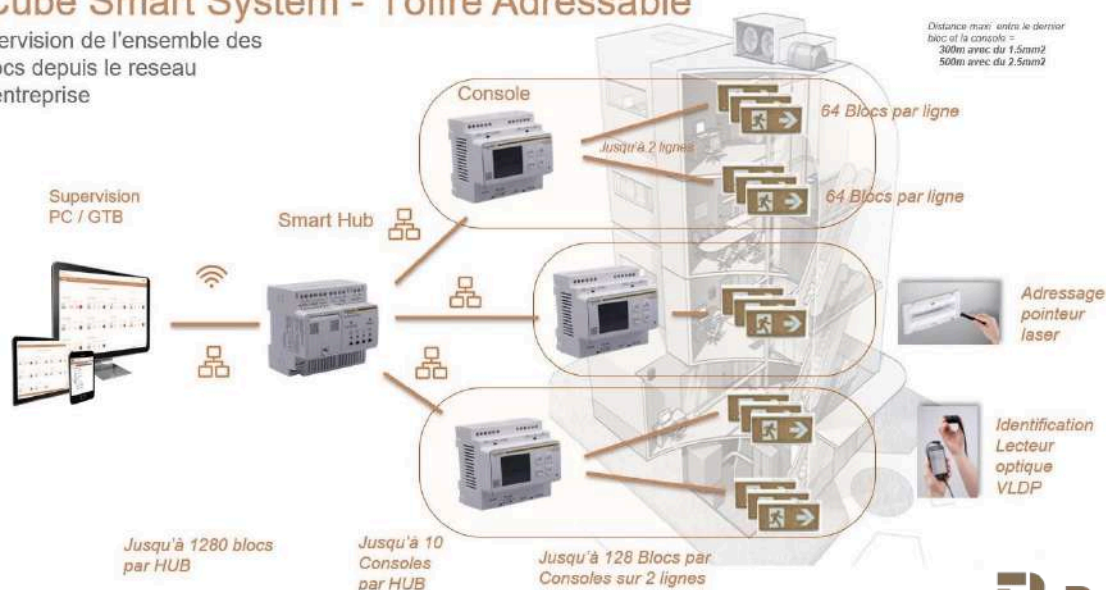

# CCTP - Central power supply

---

The design of the centrally supplied emergency lighting system, consisting of battery units, shall comply with Article EC 11.

The central power supply with integrated batteries shall be installed in an electrical service room or cabinet, in accordance with Article EL 5.

The room or cabinet shall provide 1-hour fire resistance, with a 30-minute fire-rated door.

The batteries shall be of the sealed type, equipped with a dedicated rectifier-charger, in accordance with standard NF C 58-311.

In compliance with Article 554.2.3 of NF C 15-100, the room or cabinet shall be equipped with high ventilation (VH) and low ventilation (VB) openings.

The central emergency lighting power supply shall be installed in the technical room and shall be sized to supply all emergency lighting luminaires, including escape route lighting and anti-panic lighting for the room/building.

The system shall provide an autonomy of one hour at nominal power and shall be of the non-maintained type.

All luminaires shall comply with the NF AEAS standard.

The wiring of the luminaires shall be carried out using CR1 fire-resistant cables, installed on cable trays.

All junction boxes shall be 960°C rated, fitted with ceramic terminal blocks.

The central power supply shall have the following characteristics:

- Operating voltage: 48V / 110V / 230V, type OND / AE48 / AE110 xxx, by BEHAR or technically equivalent
- Power rating: from 0.25 kVA to 7.5 kVA, or 110 W to 3300 W
- Sealed batteries
- Autonomy: 1 hour at nominal power

**Large wall-mounted enclosure**



**Wall-mounted enclosure**



**Floor-standing**



# CCTP - Central power supply

---

The central power supply shall include a fault alarm contact. This general fault will be reported to the technical alarm system via a remote monitoring enclosure of the SurvEye type, manufactured by BEHAR or an equivalent.



The installation will be complemented by an anti-panic enclosure from BEHAR or an equivalent, with the following characteristics:

- Nominal voltage: 48V / 110V / 230V
- Operation: Automatic lighting only in the event of mains power failure, with multiple detection zones.
- Manual control: Possibility to switch on and off when mains power is present, according to the operational conditions of the facility.

The maximum distance between the centralized power supply and the anti-panic control panel shall be 1 meter.

