
Star

Wall mounted
Self test emergency lighting



STARR2GP
74136

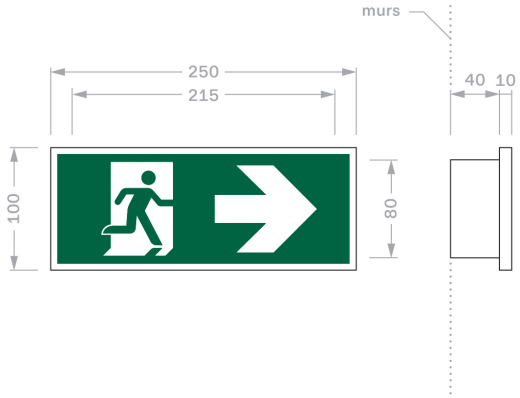

Description

Solution	Architectural
Collection	Star
Mounting Type	Wall mounted
Reparable	yes
Availability of spare parts	10 years

Technical Characteristics

Lighting Type	Non-maintained
Power supply Voltage	230 VCA
Consumption (W)	0,49 W
Consumption (VA)	1,55 VA
Luminous Flux	45 lm
Functions	Self test
Autonomy	1 hours
Battery	LiFePO4 3,2V / 0,6 Ah

Resistances and Certifications

IP Protection Rating	IP 42
IK Shock Resistance Rating	IK 07
Protection Class	Class 1
Fire Resistance	850°
Licence	19030 / 782839

Materials and Finishes

Color	Matt RAL 9003 White (Other RAL colours on request)
Frame	Polished steel
Pictogram	Screen Printing on PMMA

Béhar